

UTILITY

Attorney Docket No.

2000-0063

Total Pages

PATENT APPLICATION
TRANSMITTAL

First Named Inventor or Application Identifier

Brian Kevin Daly

Express Mail Label No.

EL580483158US

new nonprovisional applications under 37 CFR 1.53(b)

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, D.C. 20231

1. ☒ Fee Transmittal Form
(submit an original, and a duplicate for fee processing)
2. ☒ Specification [Total Pages 24]
(preferred arrangement set forth below)
- Descriptive title of invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R&D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 USC 113) [Total Sheets 7]
4. Oath or Declaration [Total Pages 3]
- a. ☒ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 15 completed)
[Note Box 15 below]
- i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s)
named in the prior application, see 37 CFR
1.63(d)(2) and 1.33(b)

5. ☐ Microfiche Computer Program (Appendix)
6. ☐ Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☒ Assignment Papers (cover sheet & document(s))
8. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
9. ☐ English Translation Document (if applicable)
10. ☒ Information Disclosure ☒ Copies of IDS
Statement (IDS)/PTO-1449 Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
13. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
14. ☐ Other :

If a CONTINUING APPLICATION, check appropriate box and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior Application No:

Prior application information: Examiner:

Group/Art Unit:


For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

16. CORRESPONDENCE ADDRESS

<input type="checkbox"/> Customer Number or Bar Code Label	(Insert Customer No. or Attach bar code label here)	or <input checked="" type="checkbox"/> Correspondence address below
--	---	---

NAME	Samuel H. Dworetzky				
ADDRESS	AT&T CORP. P.O. Box 4110				
CITY	Middletown	STATE	New Jersey	ZIP CODE	07748-4110
COUNTRY	United States of America			FAX	732-368-6932

17. SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME	Gary H. Monka	Reg. #	35290
TELEPHONE	908/221/8525		
SIGNATURE		DATE	11/01/2000

"Express Mail" Mailing Label Number EL580483158US

Date of Deposit 11/01/00

I hereby certify that this pat. appln. is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington D.C., 20231

Shawn McGee
(Printed Name of Person Mailing Paper)


(Signature of Person Mailing Paper)

FEE TRANSMITTAL

Patent Fees are subject to annual revision.

Complete if Known

Application Number

Filing Date

First Named Inventor

Brian Kevin Daly

Examiner Name

Group/Art Unit

Attorney Docket No.

2000-0063

TOTAL AMOUNT
OF PAYMENT

\$750

METHOD OF PAYMENT (check one)

1. The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to:

Deposit Account Number 01-2745
 Deposit Account Name AT&T CORP.

☒ Charge Any Additional Fee Required Under 37 CFR 1.16 and 1.17 ☐ Charge the Issue Fee Set in 37 CFR 1.18 at the Mailing Date of the Notice of Allowance

FEE CALCULATION**1. FILING FEE**

Large Fee Code	Entity Fee(\$)	Fee Description	Fee Paid
101	710	Utility(37CFR 1.53(b)) / CPA(37CFR 1.53(d)) Filing Fee	710
106	320	Design Filing Fee	
108	710	Reissue Filing Fee	
114	150	Provisional Filing Fee	

SUBTOTAL (1) 710

2. CLAIMS

☐ Filing Under 37CFR 1.53 (b)
☐ CPA Under 37CFR 1.53 (d)
☐ Amendment

Extra Claims

Fee from below

Fee Paid

Total	8	- 20 =	0	X	18	=	0
Ind.	3	- 3 =	0	X	80	=	0
						=	0

Multiple Dependent Claims

Large Fee Code	Entity Fee(\$)	Fee Description
103	18	Claims in excess of 20
102	80	Independent Claims in excess of 3
104	270	Multiple Dependent Claims
109	80	Reissue independent claims over original patent
110	18	Reissue claims in excess of 20 and over original patent

SUBTOTAL (2) 0

FEE CALCULATION (continued)**3. ADDITIONAL FEES**

Large Fee Code	Entity Fee(\$)	Fee Description	Fee Paid
105	130	Surcharge - late filing fee or oath	
127	50	Surcharge - late provisional filing fee or cover sheet	
139	130	Non-English specification	
147	2520	For filing a request for reexamination	
112*	920	Requesting publication of SIR prior to Examiner action	
113*	1840	Requesting publication of SIR after Examiner action	
115	110	Extension for reply within first month	
116	390	Extension for reply within second month	
117	890	Extension for reply within third month	
118	1390	Extension for reply within fourth month	
128	1890	Extension for reply within fifth month	
119	310	Notice of Appeal	
120	310	Filing a brief in support of an appeal	
121	270	Request for oral hearing	
138	1510	Petition to institute a public use proceeding	
140	110	Petition to revive - unavoidable	
141	1240	Petition to revive - unintentional	
142	1240	Utility issue fee (or reissue)	
143	440	Design issue fee	
122	130	Petitions to the Commissioner	
123	50	Petitions related to provisional applications	
126	240	Submission of Information Disclosure Statement	
581	40	Recording each patent assignment per property (times number of properties)	40
146	710	Filing a submission after final rejection(37 CFR 1.129(a))	
149	710	For each additional invention to be examined (37 CFR 1.129(b))	
Other fee (specify)			
Other fee (specify)			

* Reduced by Basic Filing Fee Paid

SUBTOTAL(3) 40

SUBMITTED BY

Typed or Printed Name Gary H. Monka

Complete (if applicable)

Reg. Number 35290

Signature

Date

11/01/2000

Deposit Account User ID

SEND TO: Assistant Commissioner for Patents, Washington, D.C. 20231

A METHOD FOR PROGRAMMING A MOBILE STATION USING A PERMANENT MOBILE STATION IDENTIFIER

BACKGROUND

5 1. Field of the Invention

The present invention relates generally to wireless communications, and more particularly, to a method for programming a mobile station using a permanent mobile station identifier which is programmed into the mobile station before provisioning data is downloaded to the mobile station.

10 2. Description of the Prior Art

North American cellular telecommunications networks traditionally operate in two frequency bands (A and B) in the 800-MHz hyperband. The most recent evolution in cellular telecommunications involves the adoption of six additional frequency bands (A-F) in the 1900-MHz hyperband for use in handling
15 mobile and personal communications. The 1900-MHz hyperband is also known as the Personal Communication Services (PCS) hyperband. Frequency bands within the 800-MHz hyperband and the 1900-MHz hyperband are defined in EIA/TIA Standard IS-136, which is hereby incorporated by reference herein. Other standards which define cellular telephone operations in North America include
20 EIA-627, EIA-553, and the intersystem signaling standard IS-41 which are also incorporated by reference herein. Each of the frequency bands specified for the cellular and PCS hyperbands is allocated a plurality of voice or speech channels and at least one access or control channel. The control channel is used to control or supervise the operation of mobile stations by means of information transmitted
25 to and received from the mobile stations. Such information may include, but is not

limited to, incoming call signals, outgoing call signals, page signals, page response signals, location registration signals, voice channel assignments, maintenance instructions, short message service (SMS) messages, and cell selection or reselection instructions as mobile stations travel out of the radio coverage of one cell and into the radio coverage of another cell. The voice channel is used to carry subscriber telephonic communications as well as messages requesting mobile station assistance in making hand-off evaluations. The control and voice channels may operate in either an analog mode or a digital mode.

10 In existing TIA/EIA-136 Over-the-Air Service Provisioning procedures, a mobile station is identified during the initial activation process by an Activation Mobile Identification Number ("Activation MIN") or "Dummy MIN." In TIA/EIA-136 systems, a Mobile Station ID ("MSID") is utilized to distinguish the mobile station being programmed from other mobile stations during messaging and paging processes, including the downloading of programming information to the mobile station. The MSID is typically a MIN of the type widely used in existing systems, or an International Mobile Station Identity ("IMSI") of the type used in GSM systems. A mobile station fresh out of the factory does not have the permanent MSID programmed into its memory. The "Real MIN", "Real IMSI", or both, is typically not programmed into the mobile station until all provisioning information is downloaded, and the mobile station has received a "Commit" message from the provisioning platform. Accordingly, it is the Activation MIN

15
20

that is used as a temporary MSID to identify the mobile station when provisioning information is downloaded to the mobile station.

The rapid increase in wireless customers has caused drawbacks with this procedure. The large number of mobile stations in the marketplace makes it very likely for different mobile stations to request simultaneous activation using the same "temporary MSID." The duplication of temporary MSIDs can result in one mobile station receiving programming data intended for another mobile station, and the erroneous programming resulting in one or both of the mobile stations being incorrectly activated or not activated at all.

An example of a prior art activation method is disclosed in U.S. Patent No. 5,603,084 to Henry Jr., et al. The Henry patent describes a cellular telephone that includes a programmable memory location that is remotely programmed with a unique temporary identification number. The telephone provides the temporary identification number to the cellular network, which establishes a page to the telephone using the temporary identification number as the phone ID. Data, including a permanent MSID, is transmitted during the page and the programmable memory is programmed with the MSID.

U.S. Patent No. 5,956,636 to Lipsit discloses a method for remotely activating a wireless device, which has been fully programmed prior to the activation procedure. Activation of the device includes the steps of placing a call with the device and determining the MIN using caller ID. The system prompts the user to enter a predetermined security code into the device. If this security

code originates from the same device as the detected MIN, the device is then activated.

U.S. Patent No. 6,014,561 to Mölne discloses a method for Over-the-Air Activation of a radio telephone. In this system, when a new subscriber places a
5 new call, the system receives the IMSI number and transfers the IMSI to a customer service center. An employee searches a database for previously received and stored activation information. A telephone number is then assigned to the subscriber. The telephone number and previously stored information is subsequently assigned to the subscriber, and the telephone number and activation
10 information are stored in a customer service database.

U.S. Patent No. 5,297,192 to Gerszberg discloses a method and apparatus for remotely programming mobile data into a mobile data telephone. This patent teaches downloading Number Assignment Module ("NAM") designation
parameters to a mobile unit to allow service authorization codes and activation to
15 be entered remotely. A cellular mobile customer initially calls a remote cellular system center to establish a voice communication channel between the mobile unit and the system center. A modem associated with the mobile unit is selectively bridged onto the voice communication channel for data transfer between a data source disposed at the remote center and the modem.

20 U.S. Patent No. 5,301,223 to Amadon, et al. describes an apparatus and method for use in a mobile telephone rental system. Credit card information is communicated between the mobile unit and a Voice Response System for customer registration and remote programming of the mobile unit functions and

NAM settings. Data from the mobile unit is transmitted in variable length, encrypted and error protected Packet Data Units.

SUMMARY OF THE INVENTION

In view of the above, it is an object of the present invention to provide an improved method for programming a mobile station using a permanent MSID.

It is another object of the present invention to provide a method for programming a permanent MSID into the mobile station prior to communicating programming data from the network.

It is still another object of the present invention to program a permanent MSID of either a MIN or IMSI format without requiring a TIA/EIA-136 SPACH notification process to notify the mobile station of incoming programming data.

It is yet another object of the present invention to provide a method for programming a mobile station in which a Home Location Register ("HLR") that will ultimately serve the mobile station, performs the mobile management functions during the activation process.

It is still another object of the present invention to provide a method for programming a mobile station which reduces the likelihood of conflict between an Activation MIN used by an unprogrammed mobile station and a real MSID associated with an activated or another unactivated mobile station.

It is yet another object of the present invention to provide a method for programming a mobile station which prevents programming interruption caused by conflicting Activation MINs and real MSIDs.

It is still another object of the present invention to provide a method for programming a mobile station which permits allocation of more channels and prioritizing the voice traffic over data so that the voice service is unaffected by the registration processes, even during periods of peak demand.

5 In accordance with the above objects and additional objects that will become apparent hereinafter, the present invention provides a method of activating a mobile station for communicating with a telecommunications network. The method encompasses a two-stage registration procedure whereby:

10 (1) the mobile station obtains a permanent MSID from the network; and (2) the permanent MSID is communicated to the network to identify the mobile station to enable provisioning information to be downloaded to the mobile station. Initially, a subscriber contacts the wireless carrier and supplies subscription information, including the phone type and Electronic Serial Number ("ESN"). Upon power-up, the mobile station sends a registration request message over a Digital Control

15 Channel ("DCC") to the network including a temporary activation MSID (MIN or IMSI), and ESN of the mobile station. The registration request message is received at the Mobile Switching Center ("MSC") in the network. Upon receipt, the MSC sends a registration notification message containing the activation MSID and ESN to an Over-the-Air Activation Function ("OTAF"). The network verifies

20 whether the activation MSID is associated with the mobile station based upon the subscription information and, if verified, the OTAF sends a registration notification message containing the permanent MSID to the MSC. This

permanent MSID is then communicated over the network to the mobile station, which stores the permanent MSID in NAM or SIM memory.

During the second part of the registration process, the permanent MSID and ESN are communicated from the mobile station to the MSC over the DCC.

5 The MSC then sends a registration notification message to an HLR assigned to the permanent MSID. The HLR verifies the mobile station and sends a registration notification message to the MSC, acknowledging receipt of the registration notification message. The MSC then communicates a registration accept message to the mobile station. The HLR sends a message to the OTAF
10 including the permanent MSID, ESN and address of the MSC where the mobile station is registered, requesting that the remaining programming information be sent to the mobile station. The OTAF acknowledges the request to the MSC, and sends programming data to the MSC identified by the HLR. The MSC then sends a SPACH notification of programming data on the digital control channel to the
15 mobile station. Upon successful receipt, the mobile station sends a SPACH confirmation to the MSC. The MSC then downloads the programming data to the mobile station. Upon completion, the mobile station acknowledges receipt of the programming data to the MSC, and the MSC notifies the activation center of a successful download of programming data to the mobile station.

20 This two-stage registration procedure reduces the likelihood of conflicting activation MINs by using the real MSID to identify the mobile station to which the programming data is being downloaded.

The present invention will now be described with particular reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic of a representative wireless communications system;

5 FIG. 2 is a schematic of relevant components of the wireless communications system for implementing the method for programming a mobile station in accordance with the invention;

FIG. 3 is an illustrative schematic of a mobile station;

10 FIGS. 4A-4C depict a flowchart sequence for programming a mobile station in accordance with the invention; and

FIG. 5 is an operational flow diagram of the programming method shown in FIGS. 4A-4C.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

With reference now to the drawings, FIG. 1 depicts a representative
15 wireless communications system (“WCS”) 10. The WCS 10 serves a number of wireless mobile stations (“MS”) 12_{A-F} and wireline terminals (not shown) within a geographic area partitioned into a plurality of spatially distinct regions called “cells” 14_{A-C}. Each cell 14 includes a respective base station (“BS”) 16_{A-C}, and a boundary represented by an irregular shape that depends on terrain,
20 electromagnetic sources and many other variables. The mobile stations communicate via one or more wireless access technologies (e.g., TDMA, CDMA, FDMA, etc.), providing one or more services (e.g., cordless, cellular, PCS, wireless local loop, SMR/ESMR, two-way paging, etc.) with signals representing

audio, video, data, multimedia, etc. Each BS 16 preferably conforms to the IS-56B standard, and communicates with a Mobile Switching Center (MSC) 18, also known as a mobile telephone switching office, in accordance with well-known standards. The MSC 18 is interconnected with local switching offices (“LSO”) 20_{A,B} that access wireline terminals, and a toll switching office (“TSO”) 22, which interconnects the LSOs 20 and MSC 18 with other LSOs and wireless switching centers (indicated by the arrows in FIG. 1). The MSC 18 has several functions, including routing or “switching” calls between wireless communications terminals or base stations or, alternatively, between a wireless communications terminal and a wireline terminal accessible to a MSC 18 through LSOs 20 and/or TSO 22.

Referring now to FIG. 2, there is depicted a representative illustration of select components and communications links within the WCS 10 shown in FIG. 1. The MSC 18 interfaces through bi-directional communication with a subscription activation system 19. The subscription activation system 19 includes a home system comprising a Home Location Register (“HLR”) 24 and an Over-the-Air Activation Function (“OTAF”) 26, and a Provisioning Server (“PS”) 28. The PS 28 is the location where customer-service personnel receive activation calls and engage in voice conversations with customers pertaining to the connections to customer mobile stations. The PS 28 may interface with an interactive voice response unit (“IVRU”), not shown, of the type known in the art to handle customer calls. The PS 28 is also the location where the carrier assigns the mobile station ID to the MS 12, and is the system component responsible for

populating subscription information in the carrier's network equipment, including HLR 24. The HLR 24 and the PS 28 contain configuration and security data for the MS 12. The purpose of the HLR 24 is to keep track of a specific, predetermined group of mobile stations, wherever they may move, and to provide
5 a telephone number to routing address mapping. The OTAF 26 generates the permanent MSID, and subsequent programming information for the MS 12 in a teleservice message to the MSC 18 as will be discussed further hereinbelow. The MSC 18 is also connected to a Visitor Location Register ("VLR"), not shown, which stores and maintains information on subscribers from other home systems
10 which are roaming within the present system.

The subscription activation system 19 includes at least one MS/customer database 21. The MS/customer database 21 contains the preprogrammed Electronic Serial Number ("ESN") and Mobile Identification Number ("MIN") or International Mobile Station Identity ("IMSI") number of the MS, the MIN or
15 IMSI of the SIM card associated with the MS 12, and other information accessed by the PS 28 using the MSID. The ESN is the unique telephone serial number stored in the memory of each MS 12 during manufacture, and is used to identify the manufacturer and model of the MS 12. The ESN is an 11 digit number required by the FCC and is used in combination with the MIN during the
20 registration procedure described below. The MIN is commonly used in existing systems and the IMSI is widely used in GSM systems. The MS/customer database 21 is used for storing activation information that is later transferred by the activation system 19 to the customer database 23 of the home system of the

subscriber. Each MS 12 can be identified by the WCS 10 by data stored in memory locations in the MS. The programmable memory 32 contains the unique MIN or IMSI assigned by the cellular system. In existing TIA/EIA-136 Over-the-Air Service Provisioning procedures, an "Activation MIN" or "Dummy MIN" is used to identify the MS during the initial activation process. In TIA/EIA-136 systems, the Mobile Station ID ("MSID") is used to identify and distinguish the MS 12 being programmed from other mobile stations during messaging and paging processes, including the delivery of programming information.

With reference to FIG. 3, a representative MS 12 includes a processor 30, programmable memory 32, and non-programmable or read only memory ("ROM") 34. The MS 12 includes a conventional input keypad 36, a microphone 38, and a speaker 40. The MS 12 may include a Subscriber Identity Module ("SIM") card 35 for storing information for operation of the MS 12 in both PCS and conventional AMPS communications systems. The MS 12 can also include an "AMPS" memory (part of programmable memory 22) for controlling operation of the MS 12 when the AMPS (cellular frequency band) mode is selected. The SIM card 35 is connected to the processor 30 for retrieval of the appropriate information as required depending upon which type of system the MS 12 is communicating within. SIM cards are described more fully in the Specification of the Subscriber Identity Module-Mobile Equipment (SIM-ME) interface (GSM 11.11) by ETSI, which is hereby incorporated by reference. A transceiver 42 enables communication signals to be transmitted to and received from a BS 16 via an antenna 44 over the wireless communication path indicated generally at 46.

The processor 30 operates under stored program control and coordinates the operation of the transceiver 42 in the MS 12 and provides an interface between the other elements of the MS 12 as is well known in the art. The processor 30 inserts and extracts control messages, changes physical parameters such as channel frequencies, mode of operation, frequency band, and the like.

The processor 30 preferably includes a memory programming function for programming the programmable memory 32 in response to the receipt of a REGISTRATION_ACCEPT (Real MIN) from the MSC 18. This enables the MS 12 to be activated or programmed remotely in response to communication signals generated by the WCS 10. The communication signals may be transmitted from the WCS 10 in a page format to the transceiver 42 of the MS 12. The page preferably comprises a Short Message Service ("SMS") data string provided on a Digital Control Channel ("DCC") according to the TIA/EIA IS-136 standard. In this connection, the SMS data string may include up to 239 octets (or bytes) which can be formatted as characters of alphanumeric data.

Referring now to FIGS. 4A-4C and 5, depicted are a flow chart and operational flow diagram, respectively, of a representative method for implementing the programming function in accordance with the present invention. In Fig. 5, the vertical axis represents time and the horizontal axis represents operational flow. Generally, the method involves first and second registration procedures whereby during the first registration, the network assigns and provides a permanent MSID to the MS 12. During the second registration, the MS 12 identifies itself with the permanent MSID and programming data (provisioning

information) is downloaded to the MS 12. In this manner, the permanent MSID is stored in the MS 12 prior to the data download procedure.

The activation process is initiated when a customer/subscriber calls the carrier's activation center within the subscription activation system 19. At block 48 (FIG. 4A), the subscriber supplies subscription information to the carrier, including phone type and ESN. This information is stored in the MS/customer database 21.

At block 50, the carrier's PS 28 generates a subscription for the subscriber, assigns a permanent mobile station ID ("PERM_MSID") to the BS 12 and a directory number used to call that phone. The PERM_MSID is either in the MIN or IMSI format. The PERM_MSID is stored in the MS/customer database 21 along with the applicable subscription information.

At block 52, the subscription information is populated in the carrier's network equipment, and PERM_MSID is communicated to HLR 24, where it is stored in a home system database 23. At this time, Number Assignment Module ("NAM") provisioning data, information intended to be stored in the MS specific to the mobile subscriber, is sent to the OTAF 26 with subscription related parameters to be programmed into the MS 12 at block 54. The provisioning record is identified by the ESN of the MS 12 sent to the OTAF 26. NAM parameters include the Public Service ID ("PSID"), the Residential Service ID (RSID"), etc. The NAM is part of the Short Message Service ("SMS") data string, which may include up to 293 characters originating from the PS 28 and

transmitted from the BS 16 20 according to the TIA/EIA IS-136 standard.

Exemplary NAM parameters may be listed as follows:

	Parameter	Example
5	ESN	15503124387
	MIN	411-034-2112
	Access Overload Class	015
	Group ID	10
	Security Code	73844
10	Group ID Mark	10
	Initial Paging Channel	444
	Secondary Paging Channel	805
	Wake Up Message	AT&T Wireless Services
	Lock Code	144

- 15 For the NAM parameters listed above, the ESNs are stored as binary representations, but are typically displayed in either hexadecimal or decimal format. ESNs displayed in decimal format are displayed as eleven digit numbers, where the first three digits are called the manufacturers prefix and indicate the
- 20 manufacturer of the MS.

As discussed above, the memory 32 of the MS 12 is programmed by the manufacturer with an initial activation number. The initial activation number such as a MIN or IMSI may also include predetermined digits chosen from the ESN, such as, for example, the least significant 10 digits of the ESN. After the

25 subscriber powers up the MS 12 at block 56, a first wireless communication is established between the MS 12 and the WCS 10 at block 58. In this connection, the transceiver 42 may have an activation function for establishing a wireless communication from the MS 12 to the WCS 10 before the telephone is programmed. This activation function allows the transceiver 42 to transmit the

temporary ACTIVATION_MSID (MIN or IMSI) to the system. The WCS 10 uses the ACTIVATION_MSID to initially identify the MS 12 during the first registration after an account has been set up as discussed above. The activation function can be initiated by manually dialing a dedicated telephone number from the MS 12, or such communication can be automatically initiated by the MS 12 upon initial power up. For example, a set variable in programmable memory 32 can be used to indicate whether the MS 12 has been programmed or is in an unprogrammed state. If the variable indicates that the MS 12 has not been programmed, the MS 12 automatically establishes a wireless communication to the network using a previously stored activation number to initiate the activation process when turned on or when the send button is pressed. If the activation process is initiated by the MS 12, the transceiver 42 may also include an information function allowing the MS 12 to transmit information requested by the cellular system. This information may include account information such as billing information, service information, the user's name, the user's address, credit information, and other user information. This information may be supplied to the transceiver through either the keypad 40 or microphone 42. The MS 12 finds the appropriate service provider and sends the ACTIVATION_MSID in the form of a REGISTRATION(ACTIVATION_MIN, ESN) to MSC 18 on a DCC. This registration message enables the MSC 18 to uniquely identify the MS 12 during the first registration process.

At block 60, the MSC receives REGISTRATION (ACTIVATION_MIN, ESN) from MS 12, and identifies ACTIVATION_MSID (ACTIVATION_MIN).

The MSC 18 then routes a registration notification message REGNOT(ACTIVATION_MSID, ESN) to the HLR/OTAF. At block 62, the OTAF 26 receives the registration and confirms that the ESN passed in the registration corresponds to data stored in the OTAF's programming database.

- 5 The OTAF searches for a record waiting to be programmed into the MS 12 corresponding to the ESN supplied from that MS 12. The OTAF locates the PERMANENT_MSID assigned to the MS 12, formats a registration acknowledgment REGNOT-REAL_MSID) representing the real MSID for the MS 12, and sends REGNOT-REAL_MSID) to MSC 18.

- 10 At block 64, the MSC 18 receives the registration acknowledgement, and sends a registration accept message REG_ACCEPT-REAL_MIN) to MS 12 over a DCC via communication path 46. The MS 12 receives REG_ACCEPT, and stores REAL_MIN in NAM 37 or SIM 35 programmable memory 32, thereby overwriting the ACTIVATION_MIN at block 66. This completes the first
15 registration process which provides the MS 12 with a permanent MSID.

- The second registration is initiated at block 66 when the MS 12 sends a new registration message, REGISTRATION-REAL_MSID, ESN), to MSC 18 over a DCC. The MSC 18 routes a registration notification message REGNOT-REAL_MSID, ESN) to the HLR 24 assigned to the permanent MSID
20 at block 68. The HLR 24 then sends an acknowledgement message REGNOT-REAL_MSID) to the MSC 18 that issued the request at block 70. The MSC 18 sends a registration accept message REG_ACCEPT-REAL_MIN) to the MS 12 at block 72, signaling the MS 12 that it is now ready to receive

programming data from the WCS 10. The data download process is initiated with the HLR 24 sending a notification to the OTAF 26 to send programming information to the MS 12. The message may be formatted in terms of an SMS data string discussed above. At block 74, the HLR 24 sends a data download request message SMSREQ(MSID, ESN, SMSTID, SMSADDR) to OTAF 26. This information includes the permanent MSID, the ESN, and the address of the MSC 18 (SMSTID, SMSADDR) where the MS 12 is registered. The OTAF 26 acknowledges the request, SMSNOT, at block 76. The OTAF 26 then sends the programming information in a teleservice message(s) to the serving MSC 18 identified by HLR 24 in the form SMSREQ[MSID, SMSTID, SMS_BEARERDATA(NAM DATA)] at block 78. The serving MSC 18 then sends a SPACH notification of R-DATA to the MS 12 identifying the MS with PERMANENT_MSID at block 80. Upon successful receipt, the MS 12 sends a SPACH confirmation at block 82 to MSC 18. The SPACH is a logical channel used to send information to specific mobile stations regarding SMS point-to-point ("SMSCH") paging and to provide an Access Response Channel ("ARCH"). The SPACH may be considered to be further subdivided into 3 logical channels, the SMSCH, ARCH and PCH, which are known in the art. The attributes of the SPACH are: unidirectional (downlink), shared, and unacknowledged. The SMSCH is point-to-multipoint. The ARCH and SMSCH are point-to-point. After SPACH confirmation, the MSC 18 sends programming R-DATA(NAM DATA) to MS 12 at block 84. Methods of remote programming are disclosed, for example, in U.S. Pat. No. 5,301,223 entitled "Cellular Telephone System with

Remote Programming, Voice Responsive Registration and Real Time Billing” to Amadon et al., and U.S. Pat. No. 5,297,192 entitled “Method and Apparatus for Remotely Programming a Mobile Data Telephone Set” to Gerszberg. The disclosures of these patents are hereby incorporated by reference. Upon successful receipt of the programming data, the MS 12 sends R-DATA_ACCEPT to the MSC 18 at block 86. If no response is received, SMS data may be retransmitted. The MSC 18 in turn sends a successful download message SMDPP to the OTAF 26 at block 88. The MS 12 writes NAM DATA to the NAM 37 or SIM 35 in programmable memory 32 at block 90.

After the programming step has been completed, the WCS 10 may automatically initiate a call to the MS 12 to verify proper programming. This call may also be used to indicate to the user that the MS 12 is operational. When the user answers this call, a recorded message can be played indicating that the MS 12 is now operational. Alternatively, a predetermined signal on the phone such as a tone or a light may indicate that the MS 12 has been programmed. This signal may also be initiated by the page used to program the MS 12.

As described above, a flag may be set in a programmable memory location 32 of the MS 12 to indicate that the MS 12 has been programmed for use in the WCS 10. Accordingly, if the attempted programming is unsuccessful, the programming may be re-initiated, and the flag will indicate that the MS 12 has not yet been programmed. The flag may comprise a memory location in the programmable memory 32 in the MS 12, which is programmed to a first variable when the MS 12 is manufactured to indicate that the MS 12 has not been

programmed, and which is programmed to a second variable by the processor 30 of the MS 12 after the MS 12 has been successfully programmed.

The present invention has been shown and described in what are considered to be the most preferred and practical embodiments. It is anticipated, however, that departures may be made therefrom and that obvious modifications will be implemented by those skilled in the art.

CLAIMS

I claim:

1 1. A method of activating a mobile station for communicating with a
2 telecommunications network, comprising the steps of:

3 (a) in a first registration, providing the mobile station with a permanent
4 mobile station ID;

5 (b) in a second registration, receiving the permanent mobile station ID
6 from the mobile station; and

7 (c) communicating programming data to the mobile station.

1

1 2. The method recited in Claim 1, wherein said first registration comprises
2 the steps of:

3 (a) receiving a temporary activation mobile station ID from a mobile
4 station;

5 (b) verifying the temporary activation mobile station ID ; and

6 (c) communicating a permanent mobile station ID to the mobile station.

1

1 3. The method recited in Claim 2, wherein said second registration comprises
2 the steps of:

3 (d) receiving the permanent mobile station ID from the mobile station;

4 (e) verifying the permanent mobile station ID ; and

5 (f) communicating programming data to the mobile station.

1 4. A method of activating a mobile station for communicating with a
2 telecommunications network, comprising the steps of:

3 (a) receiving a temporary activation mobile station ID from a mobile
4 station;

5 (b) verifying the temporary activation mobile station ID;

6 (c) communicating a permanent mobile station ID to the mobile station;

7 (d) receiving the permanent mobile station ID from the mobile station;

8 (e) verifying the permanent mobile station ID; and

9 (f) communicating programming data to the mobile station.

1
1 5. The method recited in Claim 4, wherein step (a) further comprises the
2 steps of receiving the temporary activation mobile station ID and an ESN of the
3 mobile station at a mobile switching center, and sending a registration notification
4 to an over-the-air activation function; and step (b) further comprises sending a
5 registration notification containing the permanent mobile station ID from the
6 over-the-air activation function to the mobile switching center.

1
1 6. The method recited in Claim 5, wherein step (d) further comprises
2 receiving the permanent mobile station ID and ESN from the mobile station at the
3 mobile switching center; and step (e) further comprises the mobile switching
4 center sending a registration notification to a home location register assigned to
5 the permanent mobile station ID.

1 7. The method recited in Claim 6, wherein step (f) comprises:
2 the over-the-air activation function sending programming data to the
3 mobile switching center identified by the home location register;
4 the mobile switching center sending a SPACH notification of R-data to the
5 mobile station;
6 the mobile switching center receiving a SPACH confirmation from the
7 mobile station;
8 the mobile switching center sending programming data to the mobile
9 station;
10 the mobile switching center receiving from the mobile station an
11 acknowledgement of receipt of the programming data; and
12 the mobile switching center notifying the over-the-air activation center of
13 a successful download of programming data to the mobile station.

1
1 8. A method of activating a mobile station for communicating with a
2 telecommunications network, comprising the steps of:
3 (a) receiving a temporary activation mobile station ID and ESN from a
4 mobile station at a mobile switching center and sending a registration notification
5 to an over-the-air activation function;
6 (b) verifying the temporary activation mobile station ID and sending a
7 registration notification from the over-the-air activation function containing the
8 permanent mobile station ID to the mobile switching center;
9 (c) communicating a permanent mobile station ID to the mobile station;

10 (d) receiving the permanent mobile station ID and ESN from the mobile
11 station at the mobile switching center;

12 (e) verifying the permanent mobile station ID; and sending a registration
13 notification to a home location register assigned to the permanent mobile station
14 ID; and

15 (f) the over-the-air activation function sending programming data to the
16 serving mobile switching center identified by the home location register;


17 (g) the mobile switching center sending a SPACH notification of R-data to
18 the mobile station;

19 (h) the serving mobile switching center receiving a SPACH confirmation
20 from the mobile station; and

21 (i) the mobile switching center sending programming data to the mobile
22 station.

ABSTRACT

A method of activating a mobile station for communicating with a telecommunications network, the method encompassing a two-stage registration procedure whereby in the first registration procedure, a permanent mobile station ID is obtained by the mobile station and in the second registration procedure, the permanent mobile station ID is used to identify the mobile station when downloading programming data from the telecommunications network. The invention allows for programming the mobile station with a permanent MSID of either a MIN or IMSI format, without requiring a TIA/EIA-136 SPACH notification process to notify the MS of incoming programming data. In particular, the steps of the method comprise: receiving at the telecommunications network a temporary activation ID from a mobile station; the network verifying the temporary activation ID; the network communicating a permanent MSID to the mobile station; the network receiving a permanent MSID from the mobile station; the network verifying the permanent MSID and then downloading programming data to the MS.

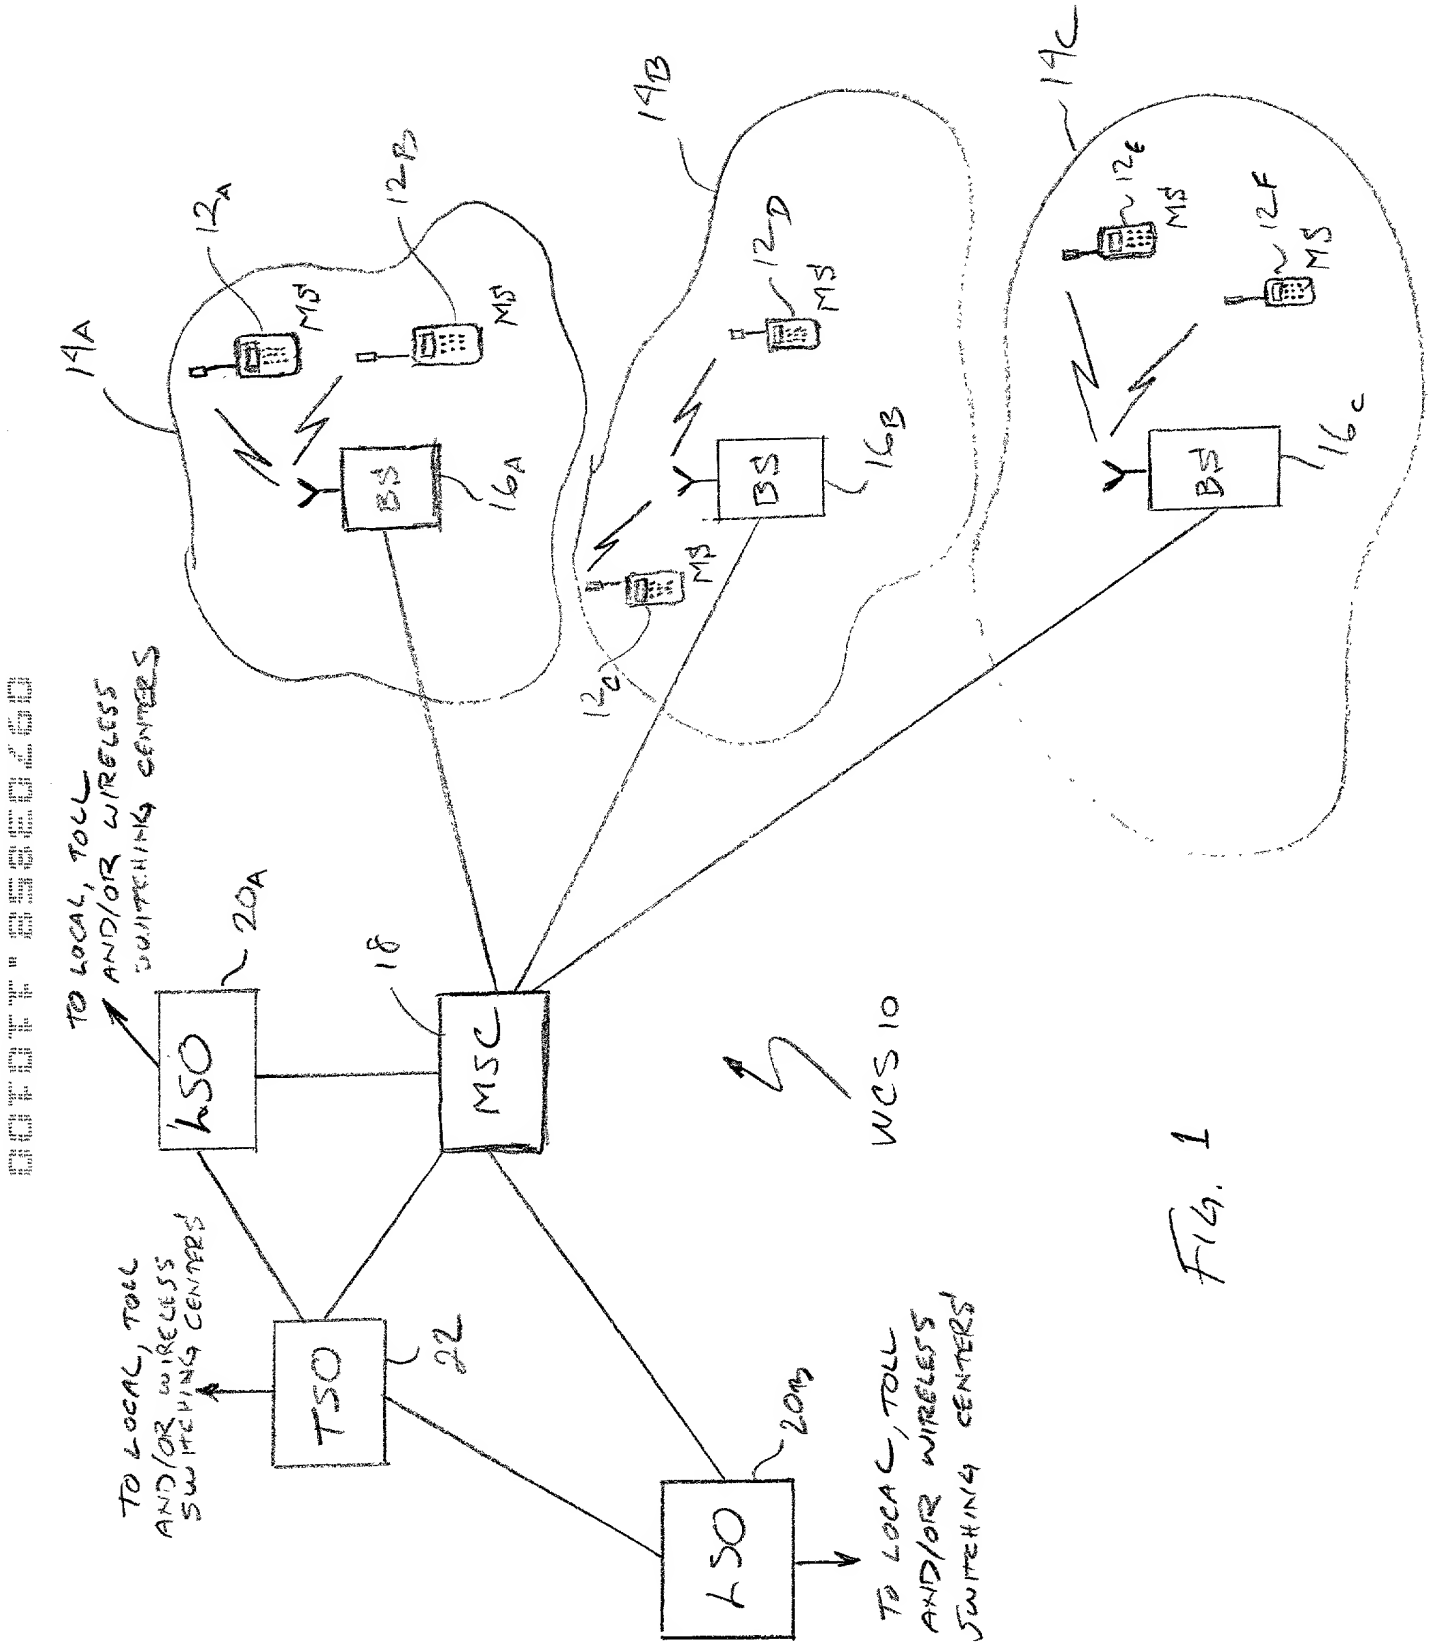

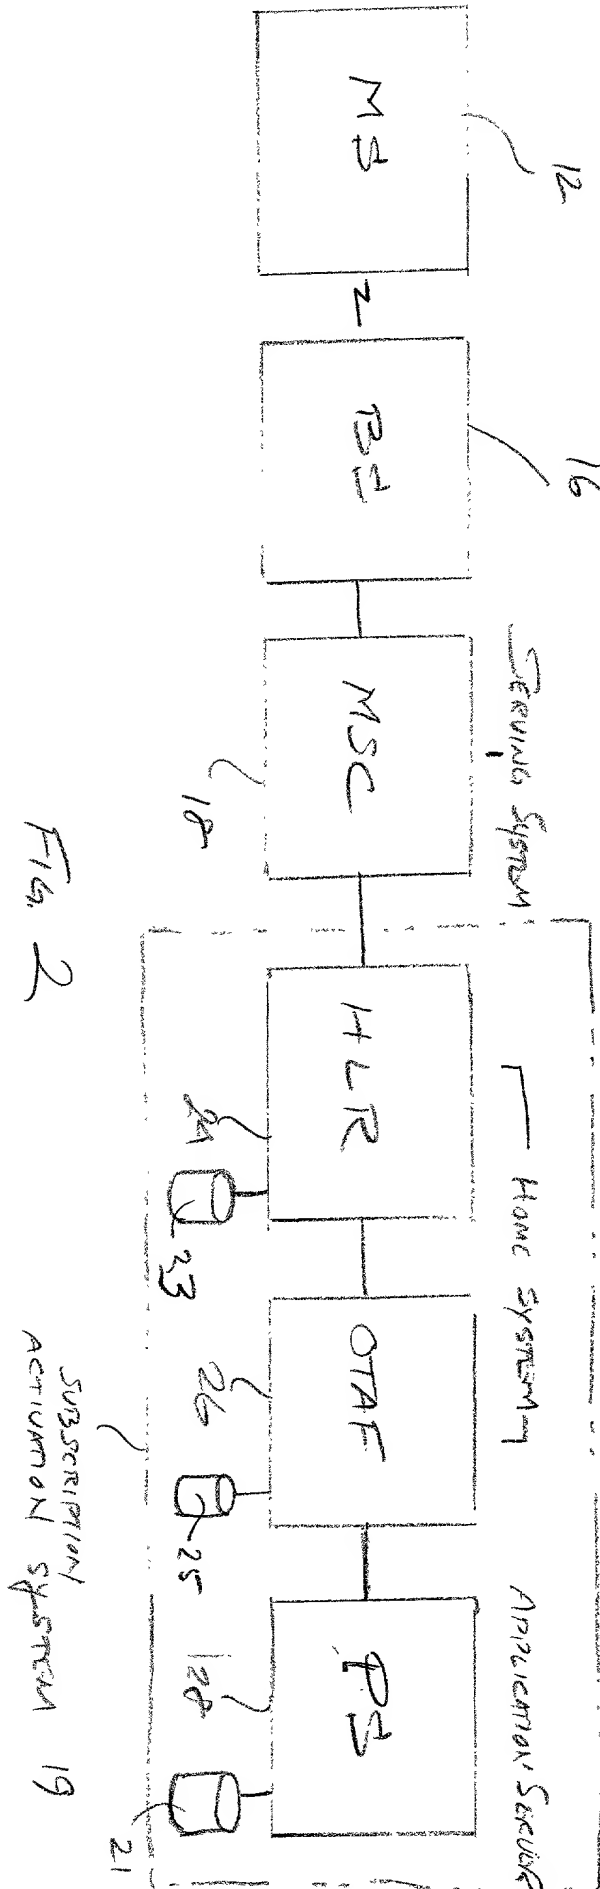


FIG. 2

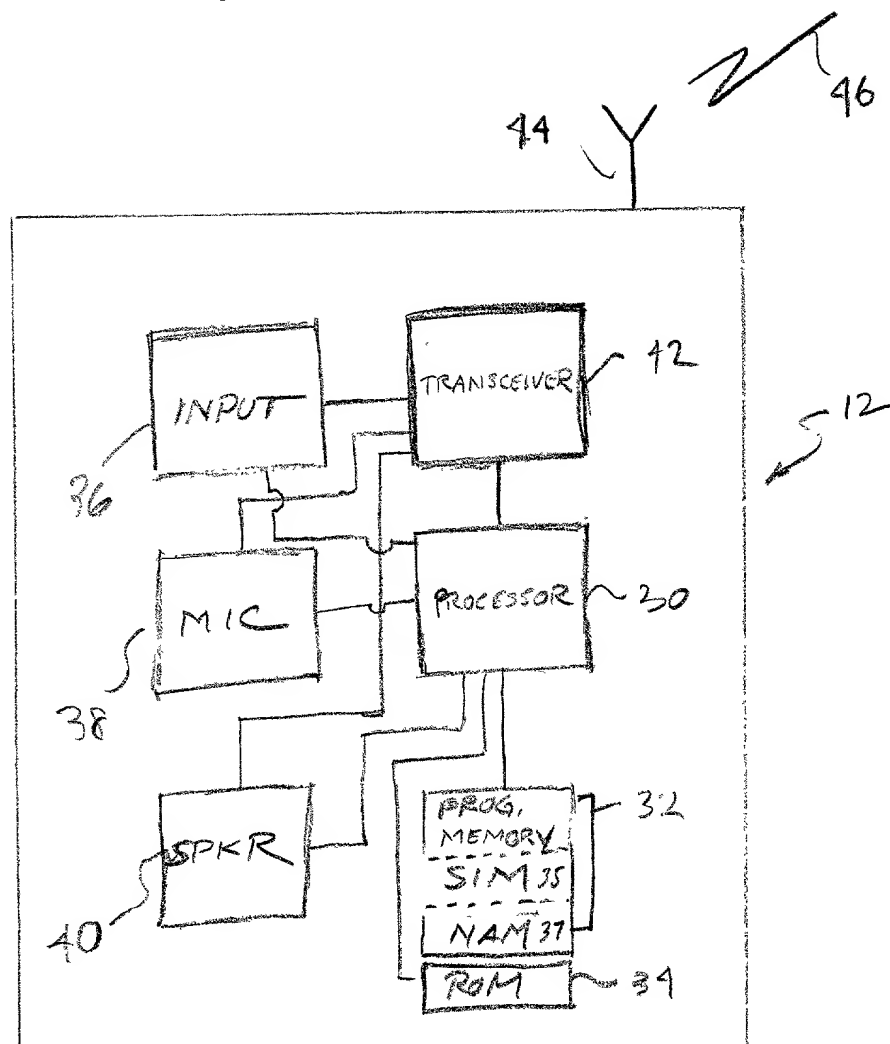


FIG. 3

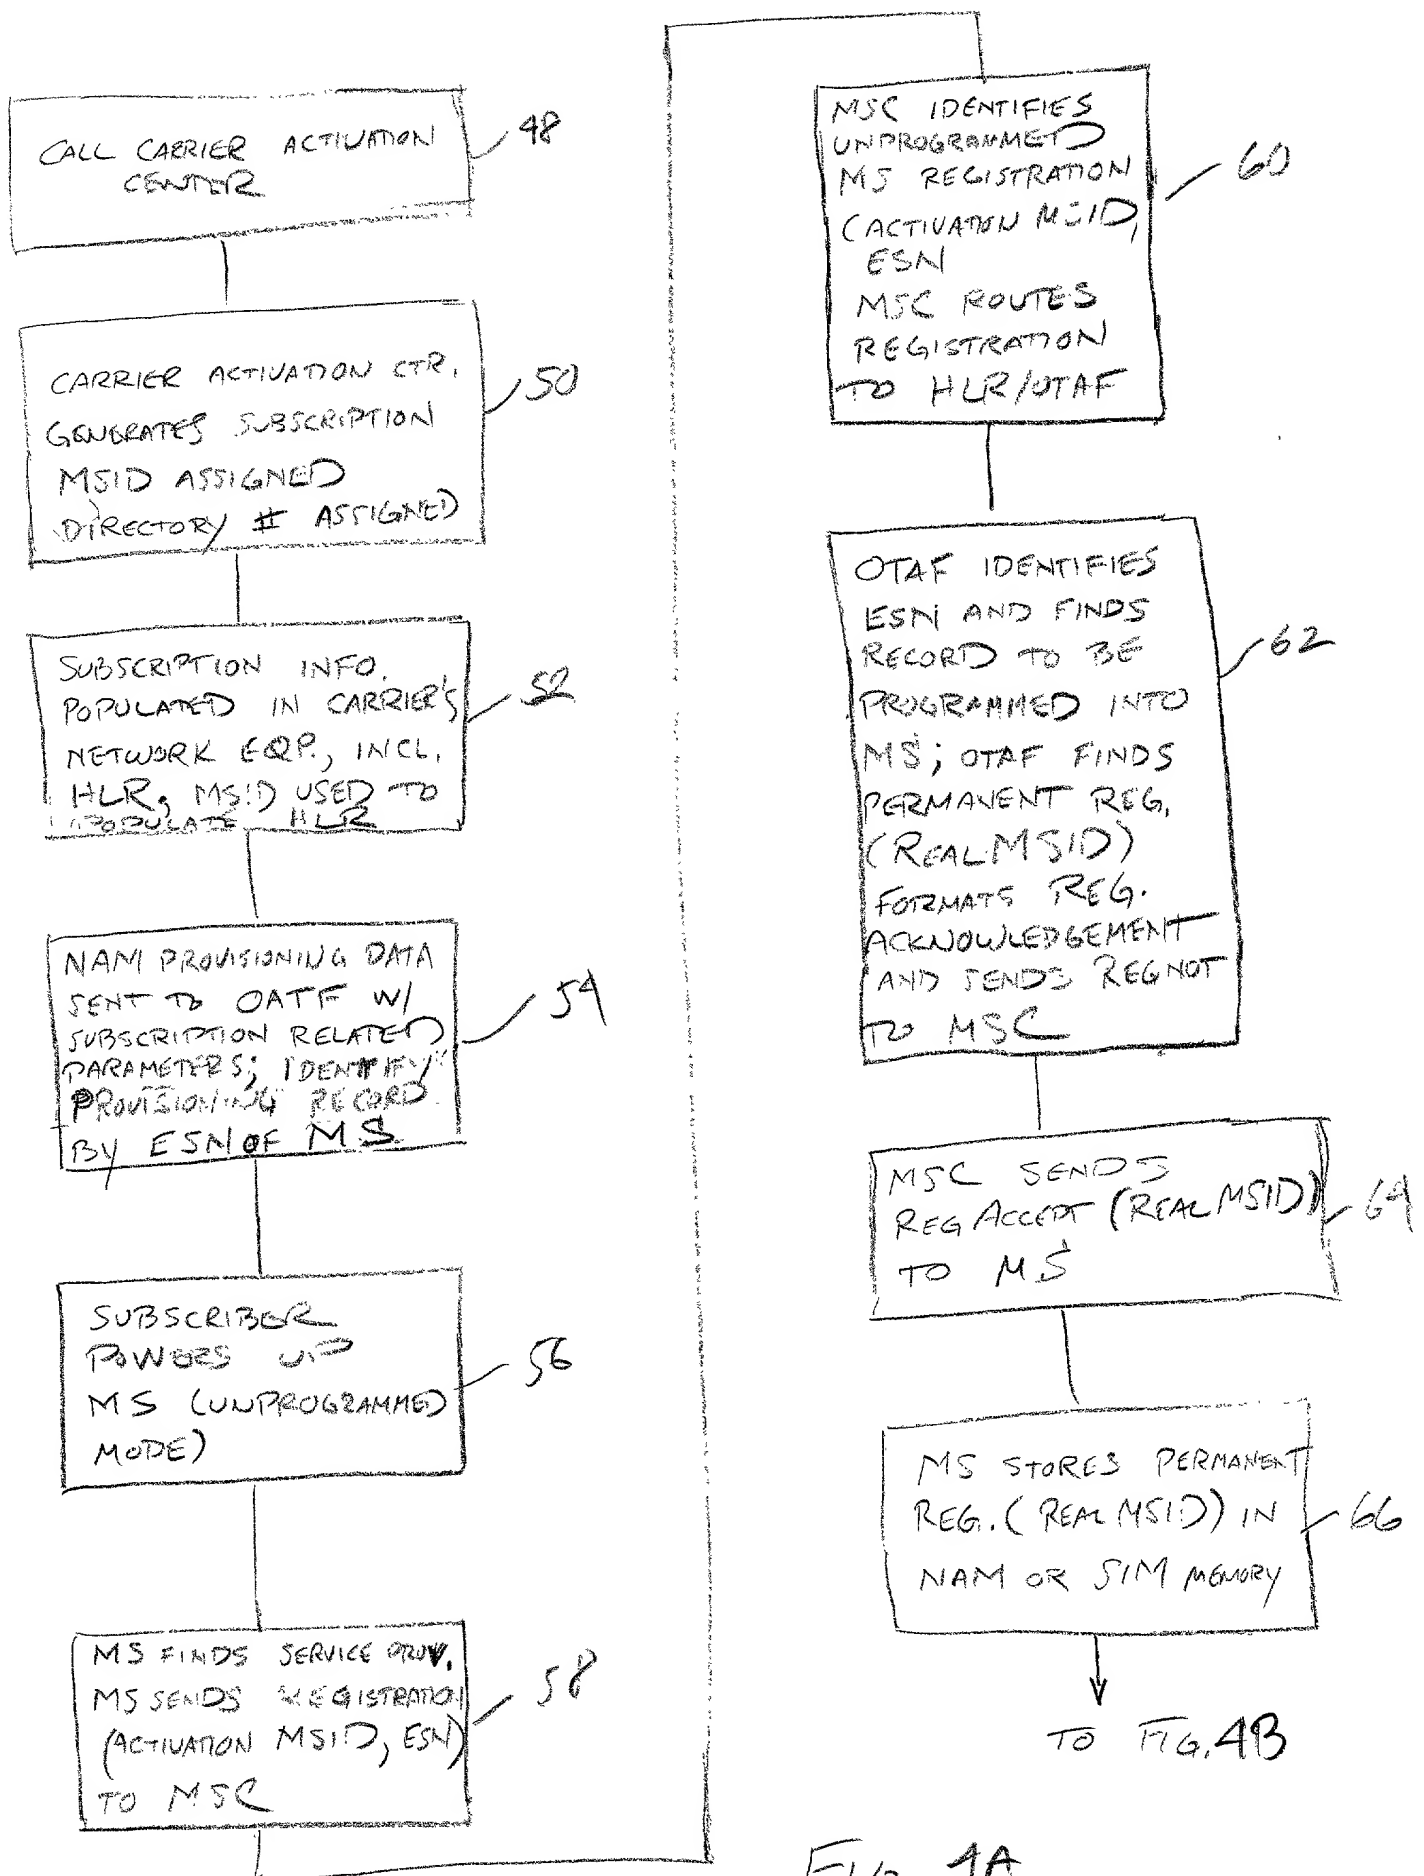


FIG. 1A

FROM FIG. 4A

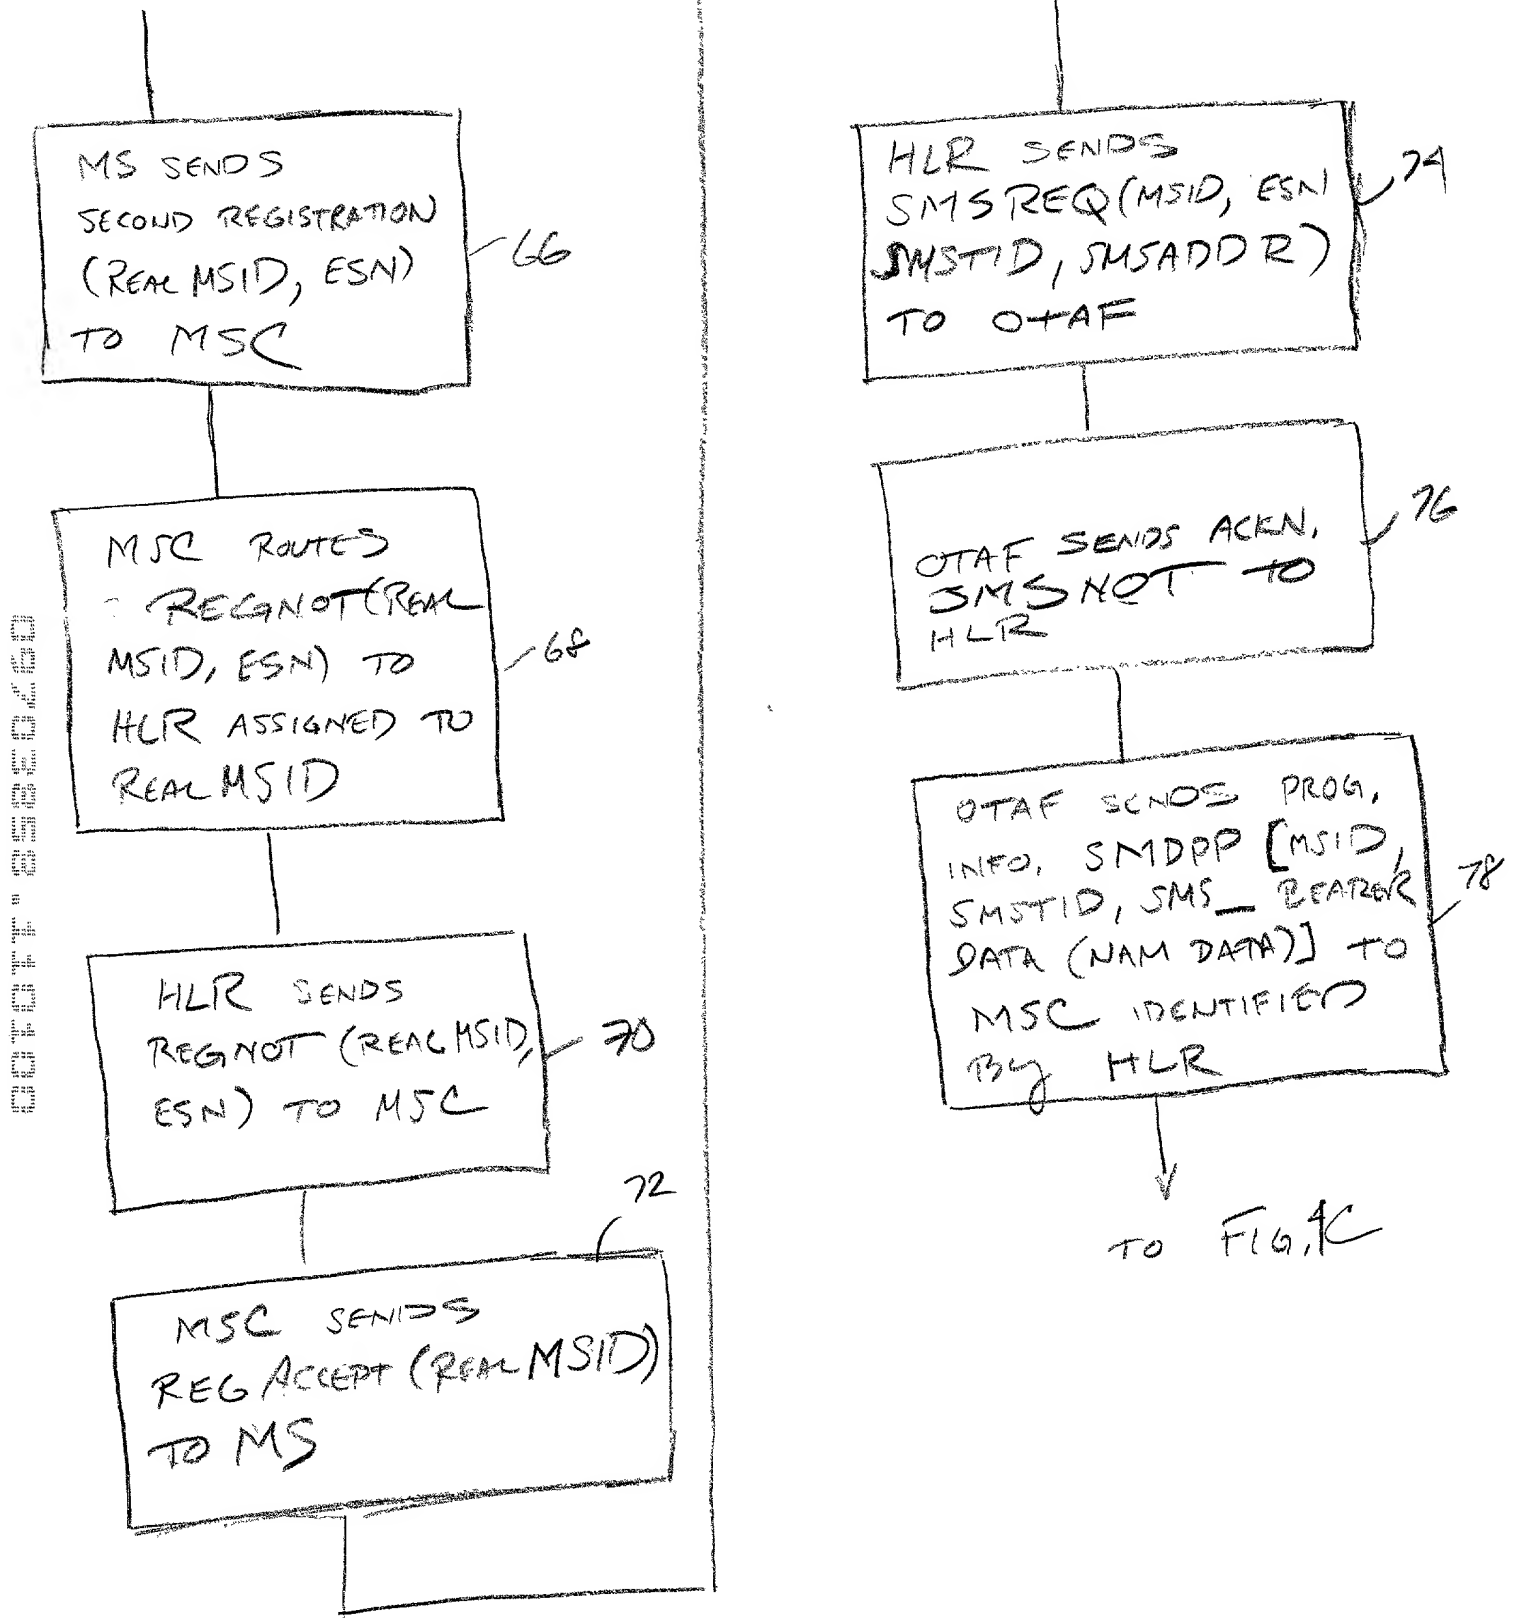


FIG. 4B

FROM FIG. 4B

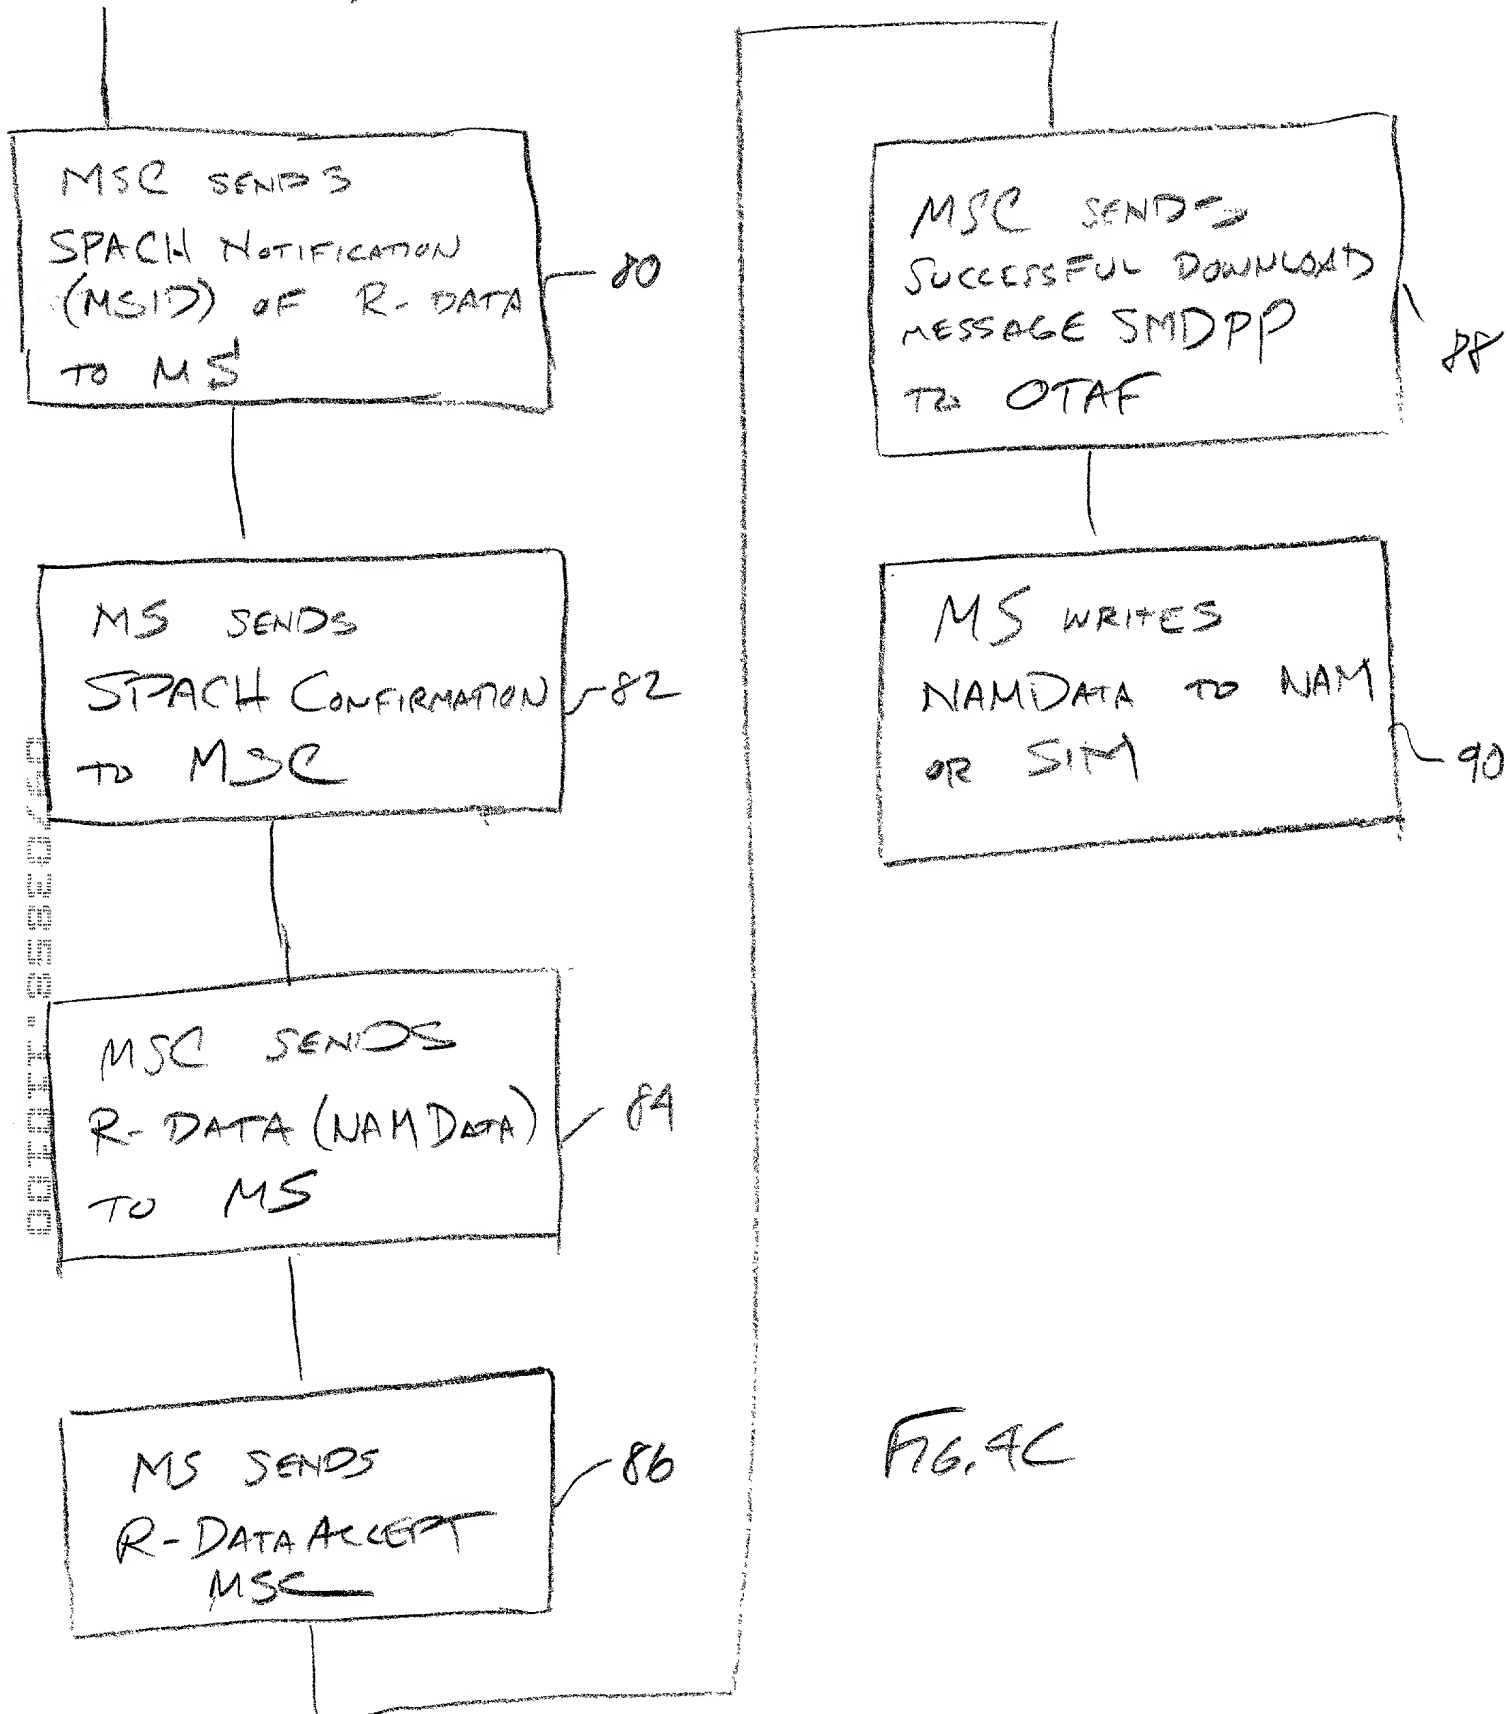


FIG. 4C

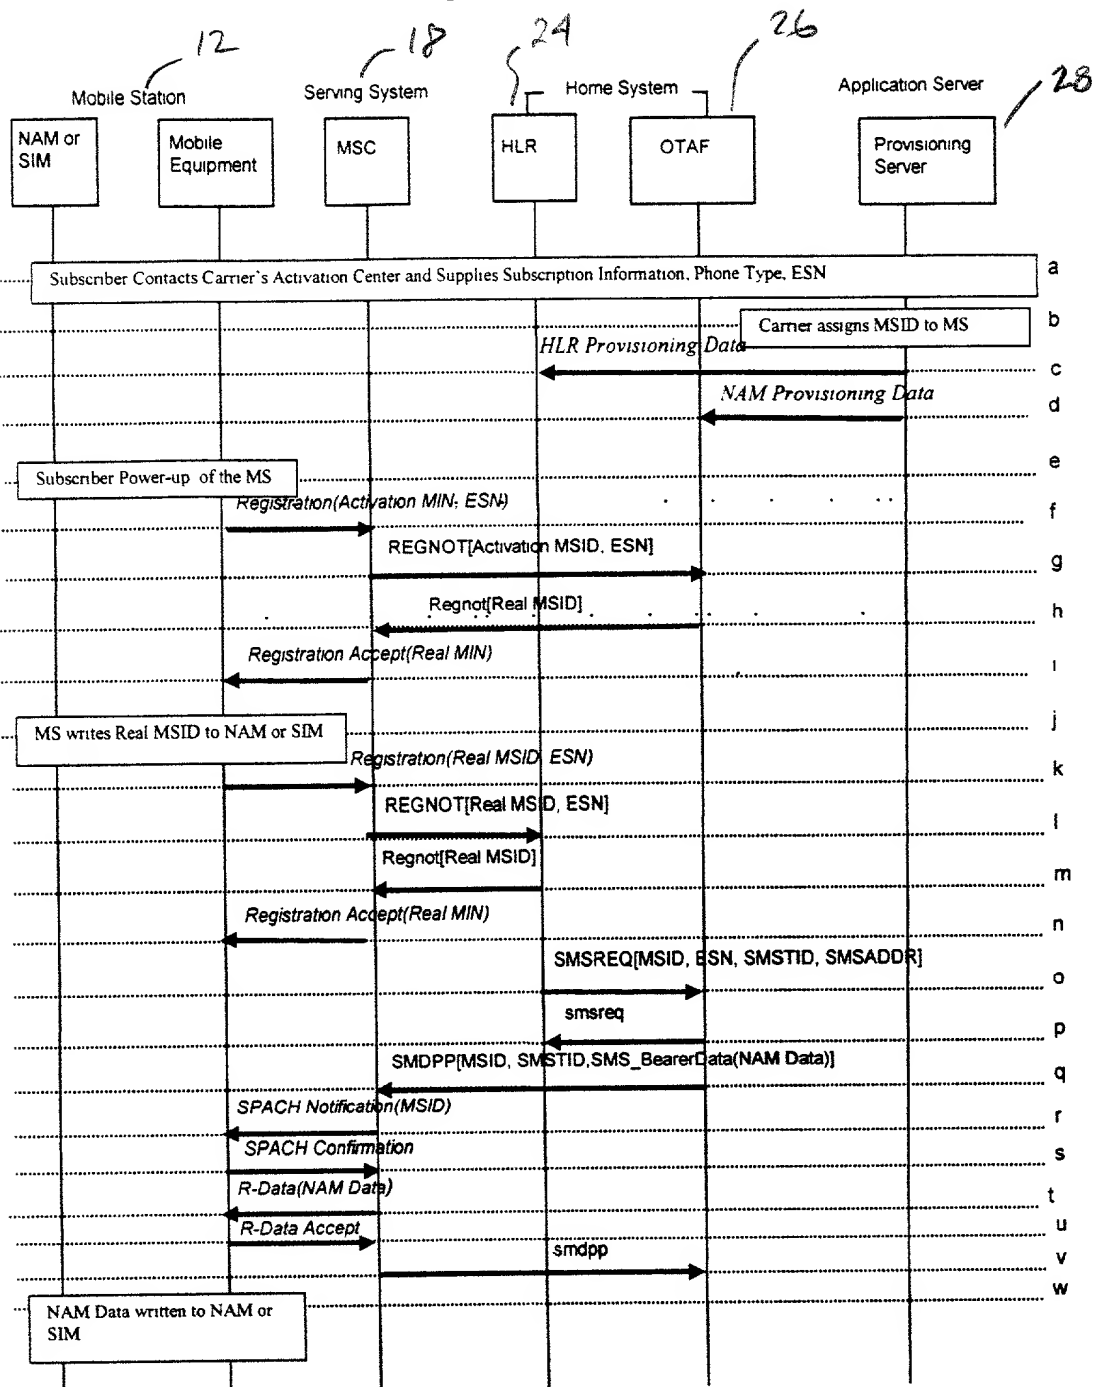


FIG. 5

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION <input checked="" type="checkbox"/> Declaration Submitted with Initial Filing OR <input type="checkbox"/> Declaration submitted after Initial Filing	Attorney Docket Number	2000-0063
	First Named Inventor	Brian Kevin Daly
	COMPLETE IF KNOWN	
	Application Number	
	Filing Date	
	Group Art Unit	
	Examiner Name	

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

A Method For Programming A Mobile Station Using A Permanent Mobile Station Identifier

(Title of Invention)

the specification of which

☒ is attached hereto

OR

☐ was filed on _____ as United States Application Number or PCT International
Application Number _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37 Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code § 119 (a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of an application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) below.

Application Number(s)	Filing Date(MM/DD/YYYY)	
		<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto

SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231

Attorney Docket Number: 2000-0063

DECLARATION - Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT International application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) with full power of substitution and revocation, to prosecute this application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected therewith:

Place Customer Number Bar Code Label here

☐ Customer Number

OR

☒ Registered practitioner(s) name/registration number listed below

Name	Registration Number	Name	Registration Number
CONOVER, Michele L.	34962	DELACRUZ, Cedric G	36498
DWORETSKY, Samuel H.	27873	GARG, Rohini K	45272
ISAACSON, Thomas M.	44166	LEE, Benjamin S.	42787
LEVY, Robert B.	28234	MCGAHAN, Susan E.	35948
MONKA, Gary H.	35290	NAVON, Jeffrey M	32711

☒ I also appoint the following additional registered practitioner(s) named on the Registered Practitioner Information (Supplemental Sheet) (PTO/SB/02C modified by AT&T Corp.) attached hereto with full power of substitution and revocation, to prosecute this application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected therewith.

Direct all Correspondence to:

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence address below

NAME	Samuel H. Dworetsky				
ADDRESS	AT&T CORP. P.O. Box 4110				
CITY	Middletown	STATE	New Jersey	ZIP CODE	07748-4110
COUNTRY	United States of America			FAX	732-368-6932

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor		<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Name	Brian Kevin Daly		
Signature	<i>Brian Kevin Daly</i>	Date	October 20, 2000
Citizenship	United States		
Address (line 1)	23826 SE 47th Place		
Address (line 2)	Issaquah		
Address (line 3)	King County		
Address (line 4)	Washington		
Address (line 5)	USA		
Zip Code	98029		

☐ Additional Inventors are being named on the separately numbered sheets attached hereto

SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231

Attorney Docket Number: 2000-0063

DECLARATION**Registered Practitioner
Information
(Supplemental Sheet)**

Name	Registration Number	Name	Registration Number
RESTAINO, Thomas A.	33444	STEINMETZ, Alfred G.	22971

SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231